



## TECHNICAL DATA


Cage Size (L X W X H)	2,0 m X 1,3 m X 2,1 m (Internal dimensions)		Max Payload	1000 Kg or 8 people	
Speed	E10/20	20 m/min	Motors Power	E10/20	2 X 4 Kw
	E10/36	0-36 m/min (with VFC)		E10/36	2 X 7 Kw (with VFC)
VFC Power	E10/20	-	Brake resistor	E10/20	-
	E10/36	15 Kw		E10/36	12 Kw
Power Supply	400 V 50 Hz - Three phase (*)		Tools socket power supply	220 V single phase (*)	
Motor brake power supply	230 V		Secondary circuit voltage	24 V	
Absorption Max Load	E10/20	18,2 A	Absorption at start-up	E10/20	125 A
	E10/36	31,6 A		E10/36	50 A
Control System for landings	- Stop next landing or - Automatic (with encoder)		Cabin doors type	Vertical Sliding	
Mast element weight Single cage	42 Kg		Mast element height	1,5 m	
Rack Module	M6		Mast type	Triangular trellis mast	
Max Wall Ties Distance	6 m		Cable Guides Distance	10 m	
Max working height	120 m		First tie at	6 m if base foundation	
Top overhang in operation	3 m		Top overhang on erection	6 m	

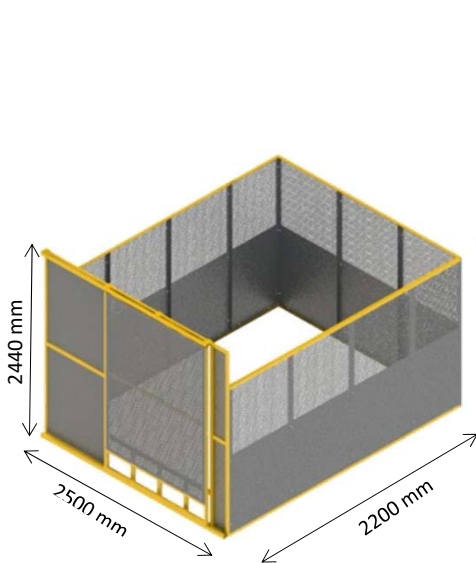

Ground Dimensions

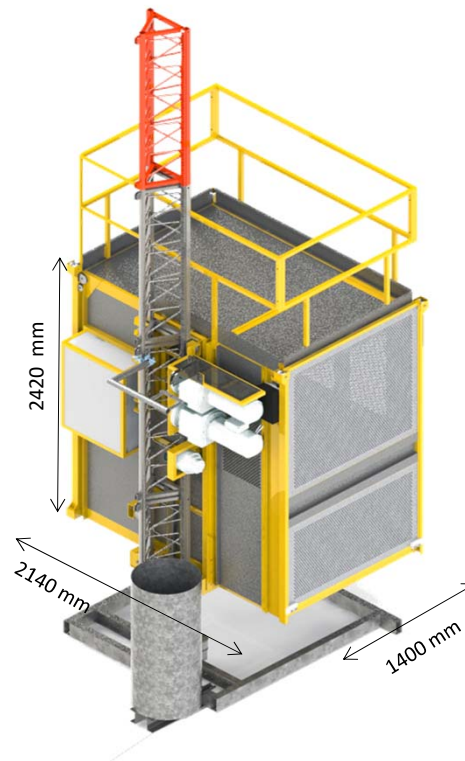

Cabin Ext. Dimensions

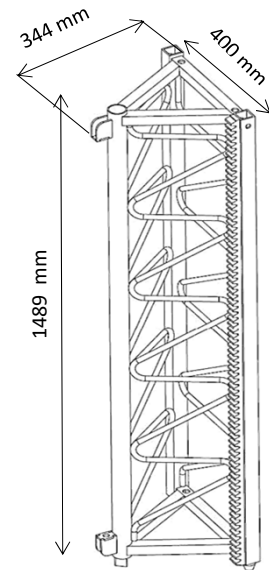

Mast Dimensions

NOTES:(\*) Other values on request - (\*\*): Optional - The Manufacturer reserves the right to change any of the above data without notice


## SATETY FEATURES

- First class geared motors self braking type (SEW Germany)	- First class Variable Frequency Converter (Schneider or equivalent)
- Overload device made with Load cells	- External independent parachute emergency brake (CE certified)
- Digital programing floor stop (Automatic control) with encoder	- Device for manual descent in case of power failure
- Digital Diagnostic of malfunctioning (Visualization on cage display)	- Internal light with battery in emergency
- Roof Trap door provided with safety switches	- Rubber shock absorber at the base
- Roof fences for protection during assembly operation	- Rack interrupted on the terminal mast element to avoid overrun
- Low voltage Electrical panel	- 220 V socket on board for tools
- Detection of correct phase	- Changing phase device
- Cabin doors with safety electro-mechanical interlock	- Landing doors, with safety electro-mechanical interlock and call
- Limit switch checking mast element presence	- Limit switch for doors and ramps
- Emergency push button	- Ascent, Descent, overrun and Emergency limit switches
- Jib for erection with electric winch	- Cable Guides and cable basket - Cable Trolley on request
- Erection ramp with safety handrail	- Erection remote control / Drop test remote control
- Low Temperature Kit , Hours counter and Automatic greasing pump available on request (**)	

Notes: Hot dip galvanised cage, ground enclosure, gates, doors, handrails, mast sections, wall Ties, ladders, chassis



**Diagnostic alarm lamps on board**

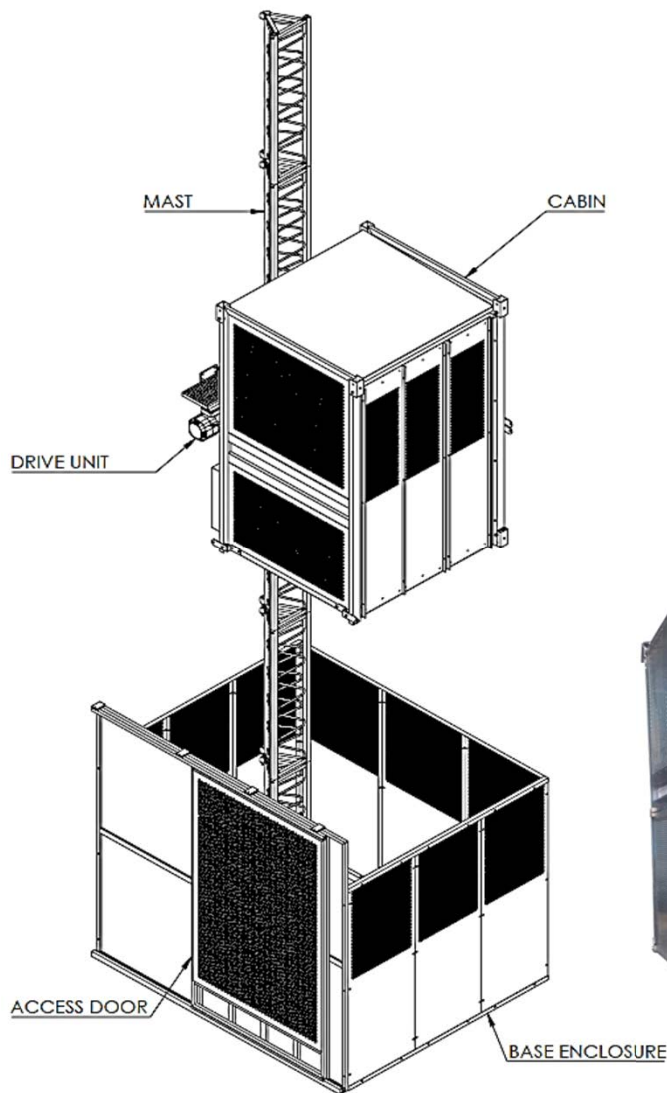

**Safety roof handrails for erection**



**Two powerful SEW motors with VFC (E10/36)**

